


PL 12 20

Used for camcorders




Unit : inch (mm)

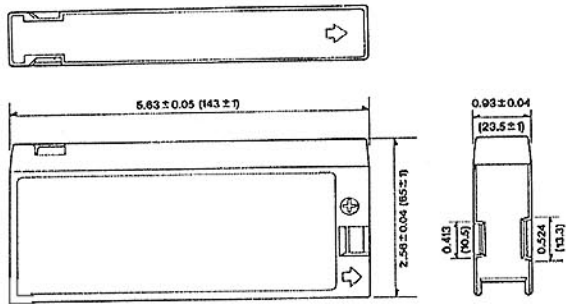

*The below data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.

Discharging Current & Discharge Duration Time*

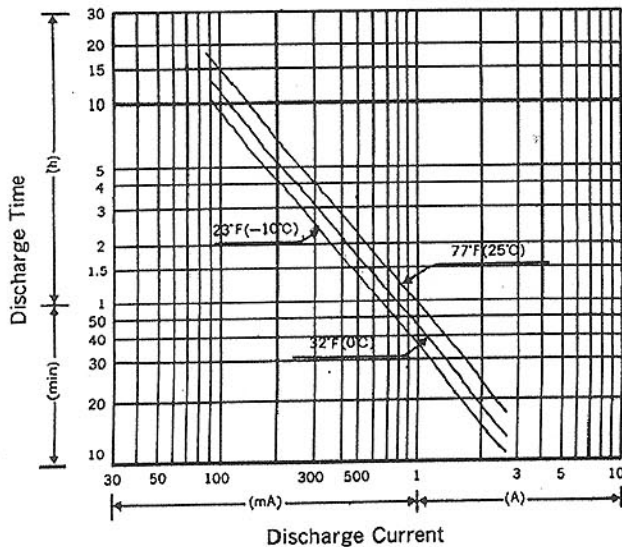

Specifications

Normal Voltage:	12V	
Rated Capacity (20hr rate)	2.0 Ah	
Weight:	Approx. 1.38lbs (630g)	
Dimensions:	total height (with terminals)	2.56" (65mm)
	height	2.55" (64.8mm)
	length	5.63" (143mm)
	width	0.93" (23.5mm)

Characteristics

Capacity*: 77°F (25°C)	20hr rate (100mA)	2.0 Ah
	10hr rate (195 mA)	1.95 Ah
	5hr rate (360 mA)	1.80 Ah
	1hr rate (1350 mA)	1.35 Ah
	1.5hr discharge to 10.5V	1.10 A
Internal Resistance:	full charged battery 77°F (25°C)	41mΩ
Capacity affected by temp.: (10hr rate)	104°F (40°C)	101%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	capacity after 3 month storage	88%
	capacity after 6 month storage	77%
	capacity after 12 month storage	54%
Terminal:	pressure contact	
Charge cycle	initial charging current less than 0.85 A voltage 14.5-15.2 V/12V 77°F (25°C)	

Note: Not designed for float service

