

# UXL1100-2

## 规格 SPECIFICATIONS



电池型号 Model	额定电压 (V) Specified Voltage	10小时率容量 Rated (Ah) Capacity (10hr rate)	外形尺寸 (mm) Approx. Dimensions				重量 (约kg) Approx Weight lbs(kg)
			长 Length	宽 Width	高 Height	含端子高度 Overall height including terminals	
UXL1100-2	2	1000	476	172	328	364	70

定电流放电性能: 温度25 °C (77 °F) 终止电压为1.80V  
Constant Current discharge performance: Temperature :25 °C (77 °F), Final discharge Voltage: 1.80V

型号 Model	时间 Time	时间																
		1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	12 h
UXL1100-2	2000	1786	1515	1299	1149	1031	943	855	787	741	606	364	270	179	122	100	85.8	45.8

## 温度及放电容量

### Effect of Temperature on Capacity

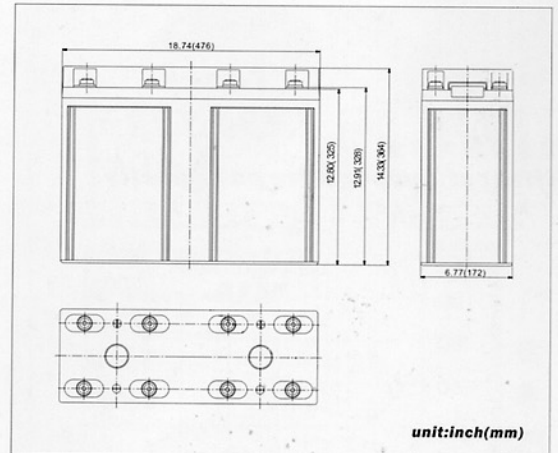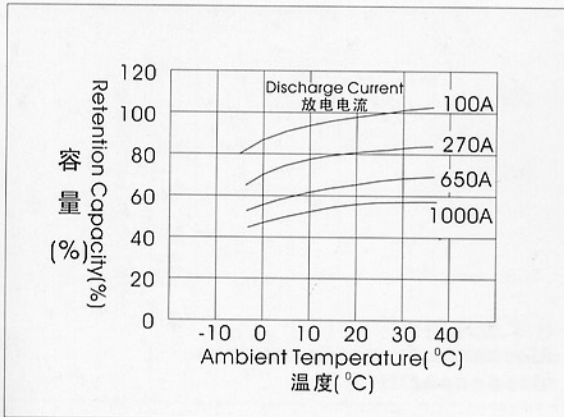

## 各率放电特性

### Discharge Curves for various rated capacity

