

# UXL2000-2

## 规格 SPECIFICATIONS


电池型号 Model	额定电压 (V) Specified Voltage	10小时率容量 Rated (Ah) Capacity (10hr rate)	外形尺寸 (mm) Approx. Dimensions				重量 (约kg) Approx Weight lbs(kg)
			长 Length	宽 Width	高 Height	含端子高度 Overall height including terminals	
UXL2000-2	2	2000	491	351	344	383	154

定电流放电性能: 温度25°C (77°F) 终止电压为1.80V  
Constant Current discharge performance: Temperature :25°C (77°F), Final discharge Voltage:1.80V

型号 Model	时间 Time	1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	12 h	24 h
UXL2000-2		4000	3572	3030	2598	2298	2062	1710	1574	1574	1482	1212	728	540	358	244	200	171.6	91.6

## 温度及放电容量

### Effect of Temperature on Capacity

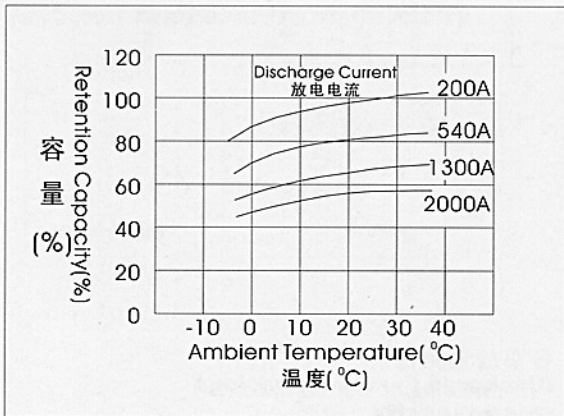

## 各率放电特性

### Discharge Curves for various rated capacity

