

# 恒力牌UXL系列电池诸特性 **UXL Series Battery Characteristics**


## 规格 SPECIFICATIONS

电池型号 Model	额定电压 (V) Specified Voltage	10小时率容量 Rated(Ah) Capacity (10hr rate)	外形尺寸 (mm) Approx.Dimensions				重量 (约kg) Approx Weight lbs(kg)
			长 Length	宽 Width	高 Height	含端子高度 Overall height including terminals	
UXL220-2	2	200	172	111	329	364	16

定电流放电性能: 温度25°C (77°F) 终止电压为1.80V

Constant Current discharge performance: Temperature :25 °C (77°F),Final discharge Voltage:1.80V

型号 Model	时间 Time	Time																	
		1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	12 h	24 h
UXL220-2		400	357	303	260	230	206	189	171	157	148	121	72.7	54.1	35.7	24.4	20.0	17.2	9.2



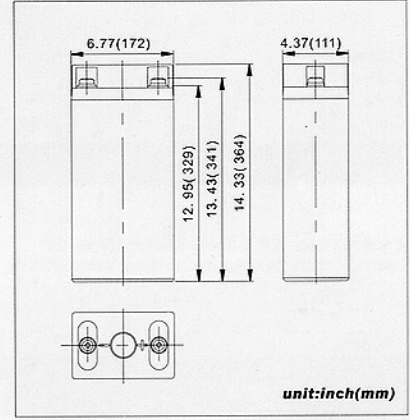


unit:inch(mm)

The relation between UXL battery float service life and temperature  
UXL型蓄电池温度和浮充寿命

## 温度及放电容量

### Effect of Temperature on Capacity

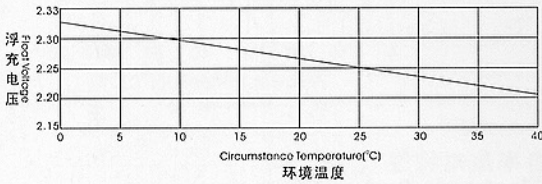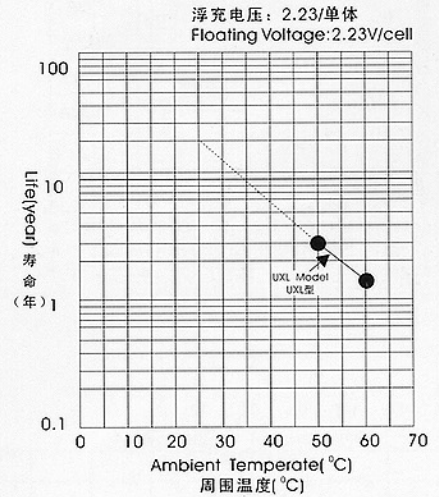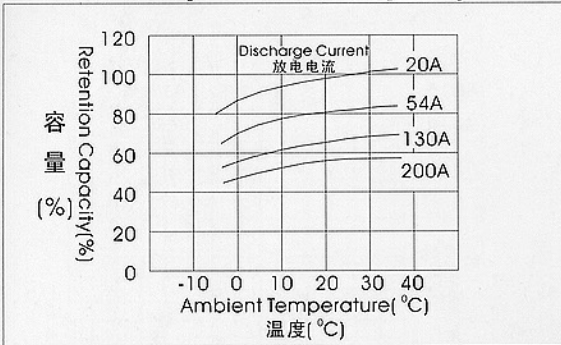

## 各率放电特性

### Discharge Curves for various rated capacity

