

UXL3000-2

规格 SPECIFICATIONS

| 电池型号 Model | 额定电压 (V) Specified Voltage | 10小时率容量 Rated (Ah) Capacity (10hr rate) | 外形尺寸 (mm) Approx. Dimensions | | | | 重量 (约kg) Approx Weight lbs(kg) |
|---------------|-------------------------------|--|------------------------------|------------|-------------|--|--|
| | | | 长 Length | 宽 Width | 高 Height | 含端子高度 Overall height including terminals | |
| UXL3000-2 | 2 | 3000 | 712 | 353 | 341 | 382 | 256 |



定电流放电性能: 温度25°C (77°F) 终止电压为1.80V

Constant Current discharge performance: Temperature :25°C (77°F), Final discharge Voltage:1.80V

| 型号 Model | 时间 Time | 时间 | | | | | | | | | | | | | | | | | |
|-------------|------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|------|------|-----|-----|-----|------|-------|-------|
| | | 1 min | 5 min | 10 min | 15 min | 20 min | 25 min | 30 min | 35 min | 40 min | 45 min | 1 h | 2 h | 3 h | 5 h | 8 h | 10 h | 12 h | 24 h |
| UXL3000-2 | | 6000 | 5358 | 4545 | 3897 | 3447 | 3093 | 2829 | 2565 | 2361 | 2223 | 1818 | 1092 | 810 | 537 | 366 | 300 | 257.4 | 137.4 |

温度及放电容量

Effect of Temperature on Capacity

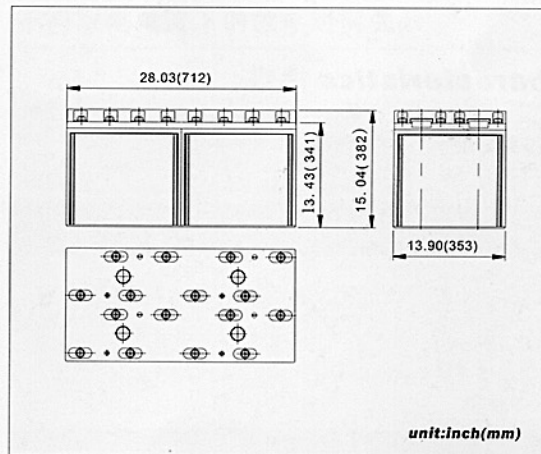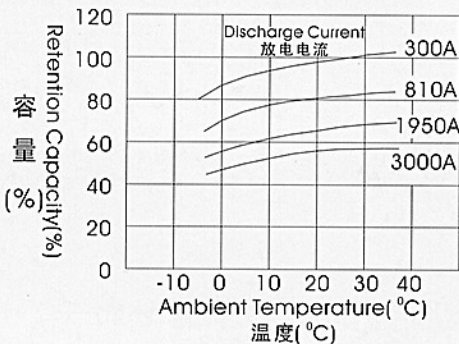

各率放电特性

Discharge Curves for various rated capacity

