


恒力牌UXL系列电池特性 UXL Series Battery Characteristics

规格 SPECIFICATIONS

电池型号 Model	额定电压 (V) Specified Voltage	10小时率容量 Rated(Ah) Capacity (10hr rate)	外形尺寸 (mm) Approx. Dimensions				重量 (约kg) Approx Weight lbs(kg)
			长 Length	宽 Width	高 Height	含端子高度 Overall height including terminals	
UXL330-2	2	300	171	151	329	364	18.8




定电流放电性能: 温度25°C (77°F) 终止电压为1.80V
Constant Current discharge performance: Temperature :25°C (77°F). Final discharge Voltage: 1.80V

时间 Time	1 min	5 min	10 min	15 min	20 min	25 min	30 min	35 min	40 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	12 h	24 h
UXL330-2	600	536	455	390	345	309	283	256	236	222	182	109	81.1	53.6	36.6	30.0	25.8	13.8

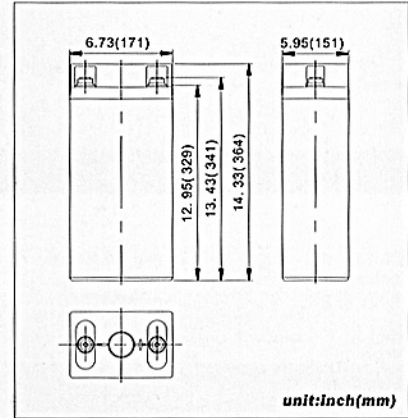

The relation between UXL battery float service life and temperature
UXL型蓄电池温度和浮充寿命

温度及放电容量 Effect of Temperature on Capacity

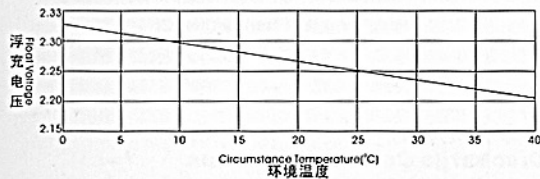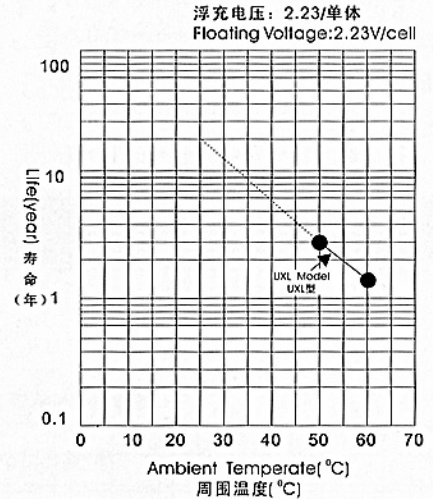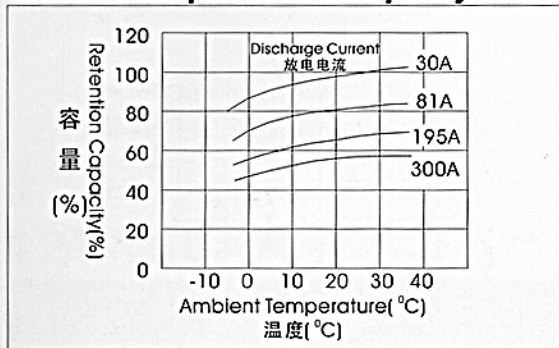

各率放电特性 Discharge Curves for various rated capacity

