

恒力牌UXL系列电池诸特性 **UXL Series Battery Characteristics**


规格 SPECIFICATIONS

电池型号 Model	额定电压 (V) Specified Voltage	10小时率容量 Rated(Ah) Capacity (10hr rate)	外形尺寸 (mm) Approx. Dimensions			
			长 Length	宽 Width	高 Height	含端子高度 Overall height including terminals
UXL400-2	2	400	211	172	325	364

定电流放电性能: 温度25°C (77°F) 终止电压为1.80V




Constant Current discharge performance: 25°C (77°F), Final discharge Voltage: 1.80V

时间 Time	1 min	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	5 h	8 h	10 h	12 h	24 h
型号 Model														
UXL400-2	792	700	600	512	336	268	220	144	108	72	48.8	40	34	18

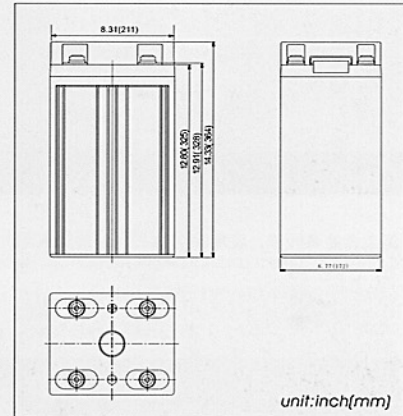

The relation between UXL battery float service life and temperature
UXL型蓄电池温度和浮充寿命

温度及放电容量 Effect of Temperature on Capacity

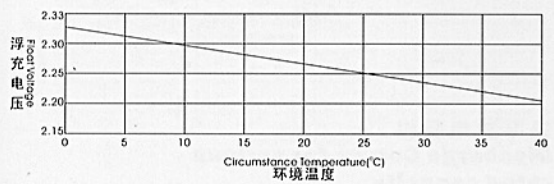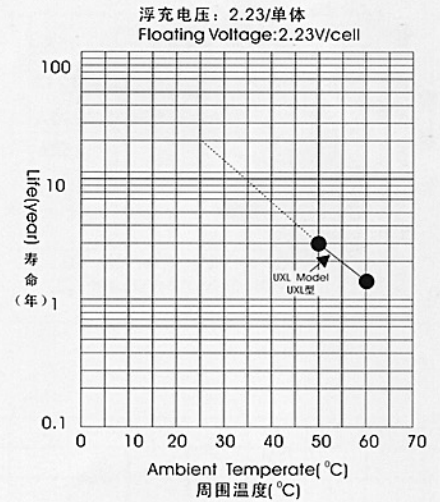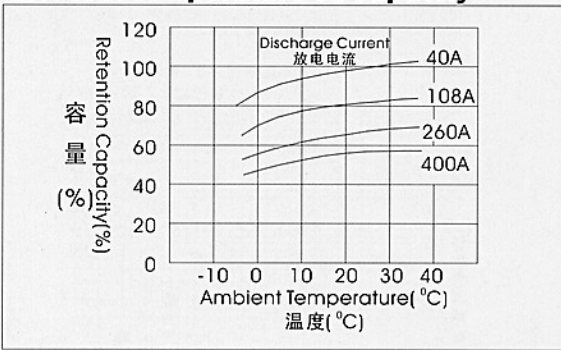

各率放电特性 Discharge Curves for various rated capacity

